




## RETARDER-PROVER FOR DANISH PASTRIES 20 LEVELS 400x600 - INLET 400 - STANDARD VERSION

No contractual pictures

### CAPACITIES

20 trays 400x600

Total of pieces : 400

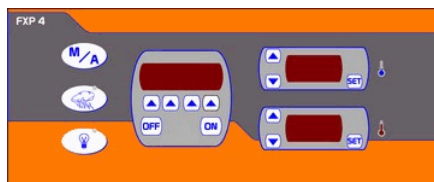

### DESCRIPTION

- Isothermal panels made of polyurethan foam, 50mm thick, density 35kg/m<sup>3</sup>, high insulation coefficient Lambda=0,022
- Outside is pre-enameled
- Internal and front are made of STAINLESS STEEL
- One large door
- Door hinges on the right hand side (factory setting)
- Stainless steel slipper-guides, pitch 63mm, adjustable every 21mm
- Machine on adjustable screw-jacks
- Regulation: FXP electronic control board, humidity regulation provided by boiler and mechanical hygrostat
- Adjustable heating power
- Tropical compressor included
- Machine delivered assembled

### OPTIONS

- Stainless steel outside
- Electric defrosting
- Lighting
- Window
- Rollers (4) + Screw jacks (2)

Control system :

- FPCHR control board including "Cold reset" (LUXE version)

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
575 mm	905 mm	2020 mm	1425 mm	400 mm	121 kg	230V MONO 50Hz	0.9 KW	3.9 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
1/4 CV	511 W	400 W	400 W	(150) W	R404A	0.8 kg		