



RETARDER PROVER CABINET FOR FRESH DOUGH 24 TRAYS 460x800 - INLET 460 - STANDARD VERSION


No contractual pictures



CAPACITIES

24 trays 400 x 600 or 460 x 800
(Confirm the size with order)

Total of loaves on nets (400 x 800) : 120

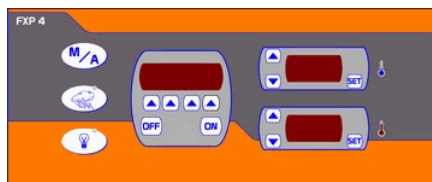

DESCRIPTION

- Isothermal panels made of polyurethan foam, 50 mm thick, density 35 kgm³, high insulation coefficient Lambda = 0,022
- Outside is pre-enameled
- Interior and front are made of STAINLESS STEEL
- Two superimposed doors
- Door hinges on the right hand side (reversible)
- Adjustable width from 460 to 320, pitch 10 mm
- Stainless steel slipper-guides, pitch 60 mm, adjustable every 20mm
- Rollers (except if separate compressor : ajustable screw-jacks)
- Regulation: electronic control board FXP4
- Humidity regulation by mean of boiler and mechanic hygostat
- Tropical compressor included

OPTIONS

- Stainless steel outside
- Electric defrosting
- Lighting
- Window
- Rollers (4) + Screw jacks (2)

Regulation:

- FPCHR control board including "Cold reset" (LUXE version)

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
635 mm	1200 mm	2250 mm	1780 mm	460 mm	203 kg	230V MONO 50Hz	1 KW	4.5 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
1/3 CV	884 W	500 W	400 W	(500) W	R404A	1.1 kg		

For overall depth including the electrical box, add + 127 mm