



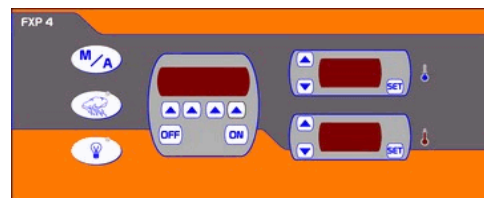

ROLL-IN RACKS RETARDER PROVER FOR FRESH DOUGH
1 CHAMBER OF 3 RACKS 520 X 820 - INLET 520 MM
STANDARD VERSION - L LAYOUT

No contractual pictures



DESCRIPTION

- Isothermal panels constituted of polyurethan foam, 50mm thick, density 35kg/m³, high insulation coefficient Lambda=0,022
- Outside is pre-enamelled
- Inside and front are made of STAINLESS STEEL
- Simplified air flow
- No resin basement
- Door hinges on the right hand side (reversible)
- Regulation: FXP electronic control board and humidity controled by boiler and mechanical hygrostat
- Adjustable heating power
- Remote compressor
- Delivered dismantled
- Racks not supplied

OPTIONS

- External panels made of STAINLESS STEEL
- Condensing unit on roof
- Double door
- Additionnal door for "Tunnel" arrangement
- Defrosting
- Window
- Lighting

Control system :

- FPCHR control board with "Cold reset"

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
1905 mm	1240 mm	2230 mm	2040 mm	700 mm	420 kg	400V TRI 50Hz	2.4 KW	6.5 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
1 1/8 CV		1887 W	1500 W	800 W	W	R404A	1.5 kg	

WARNING : Save available height : 100 mm above the top or 500 mm if cold unit located on the top. In case of double door, remove "100 mm + half of door passage" on opened door depth dimension.
For overall depth, add 120 mm corresponding to the electrical control board.