



RETARDER-PROVER CABINET
2 INDEPENDANT COMPARTMENTS 12 LEVELS 600x800
INLET 600 - STANDARD VERSION

No contractual pictures




CAPACITIES

2 x 12 grates or nets 600 x 800
 Canvas edge on 800 mm length
 Total of : 2 x 132

or

2 x 24 trays 400 x 600
 Total of danish pastries : 960

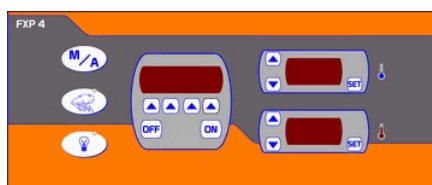

DESCRIPTION

- 2 independant compartments (2 regulations, 2 compressors)
- Isothermal panels made of polyurethan foam, 50 mm thick, density 35 kgm³, high insulation coefficient Lambda = 0,022
- Outside is pre-enameled
- Interior and front are made of STAINLESS STEEL
- Two superimposed doors
- Door hinges on the right hand side (factory setting)
- Adjustable width from 600 to 460, pitch 10 mm
- Stainless steel slipper-guides, pitch 60 mm, adjustable every 20 mm
- Rollers (except if separate compressor : ajustable screw-jacks)
- FXP electronic control board
- Humidity regulation by mean of boiler and mecanic hygrostat
- Tropical compressor included

OPTIONS

- Stainless steel outside
- Electric defrosting
- Lighting
- Window
- Adjustable screw-jacks

Control system :

- FPCHR control board including "Cold reset"

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
775 mm	1200 mm	2250 mm	1920 mm	600 mm	286 kg	230V MONO 50Hz	1.9 KW	8.3 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
2x 1/3 CV	2x 688 W	2x 500 W	2x 400 W	2x 600 W	R404A	2x 1.1 kg		

Overall depth : + 127 mm