




RETARDER-PROVER FOR FRESH DOUGH 24 LEVELS 750x900 MM - INLET 750 - STANDARD VERSION

No contractual pictures

CAPACITIES

24 grates or nets 750 x 900
Space between trays : 60 mm

Total of loaves : 360

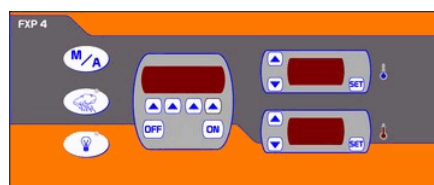

DESCRIPTION

- Isothermal panels made of polyurethan foam, 50 mm thick, density 35 kgm³, high insulation coefficient Lambda = 0,022
- Outside is pre-enameled
- Interior and front are made of STAINLESS STEEL
- Two superimposed doors
- Door hinges on the right hand side (factory setting)
- Adjustable width from 800 to 660, pitch 10 mm
- Stainless steel slipper-guides, pitch 60 mm, adjustable every 20mm
- Rollers (except if separate compressor : ajustable screw-jacks)
- FXP electronic control board
- Humidity regulation by mean of boiler and mechanic hygostat
- Tropical compressor included

OPTIONS

- Electric defrosting
- Lighting
- Outside in stainless steel
- Window
- Rollers (4) + screw-jacks (2)

Control system :

- FPCHR control board with "Cold reset"

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
975 mm	1200 mm	2280 mm	2120 mm	800 mm	293 kg	230V MONO 50Hz	1.5 KW	6.6 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
5/8 CV	1538 W	1000 W	400 W	(700) W	R404A	1.3 kg		

If separate compressor, height = 2230 mm

Overall depth : + 127 mm