



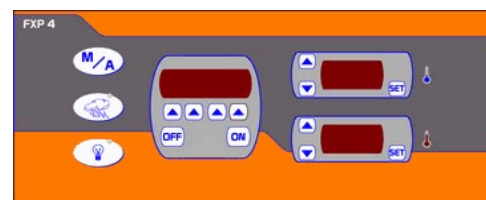

ROLL-IN RACKS RETARDER PROVER FOR FRESH DOUGH 3 CHAMBERS OF 2 RACKS 520 X 820 - INLET 520 MM STANDARD VERSION

No contractual pictures



DESCRIPTION

- Isothermal panels constituted of polyurethan foam, 50mm thick, density 35kg/m³, high insulation coefficient Lambda=0,022
- Outside is pre-enamelled
- Inside and front are made of STAINLESS STEEL
- Simplified air flow
- No resin basement
- Door hinges on the right hand side (reversible)
- Regulation: FXP electronic control board and humidity controled by boiler and mechanical hygrostat
- Adjustable heating power
- Remote compressor
- Delivered dismantled
- Racks not supplied

OPTIONS

- External panels made of STAINLESS STEEL
- Condensing unit on roof
- Double door
- Additionnal door for "Tunnel" arrangement
- Defrosting
- Window
- Lighting

Control system :

- FPCHR control board with "Cold reset"

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
2460 mm	1990 mm	2230 mm	2640 mm	550 mm	896 kg	400V TRI 50Hz	3x 1.8 KW	3X5.2 A
Cold power -10/+32°C		Heating power	Boiler power (option)	Defrosting power (option)	Cooling fluid	Cooling fluid load		
3x 5/8 CV 3x 1538 W		3x 1000 W	3x800 W	W	R404A	3x 1.3 kg		

WARNING : Save available height : 100 mm above the top or 500 mm if cold unit located on the top. In case of double door, remove "100 mm + half of door passage" on opened door depth dimension.
For overall depth, add 120 mm corresponding to the electrical control board.