



DEEP FREEZER / PRESERVER - 4 HALF DOORS 600x800
4 LEVELS AT -35°C / 33 LEVELS AT -20°C - INLET 600
1 COMPRESSOR - 1 EVAPORATOR - REINFORCED COLD

No contractual pictures




CAPACITIES

1 door for deep freezer -35°C, i.e. 8 trays 400x600
 3 doors for preserver -20°C, i.e. 66 trays 400x600

2 trays 400x600 per level or 1 tray 600x800 per level
 tray inlet 600mm

Deep freezing capacity for fresh dough +20°C to -18°C: 27
 kg/hour

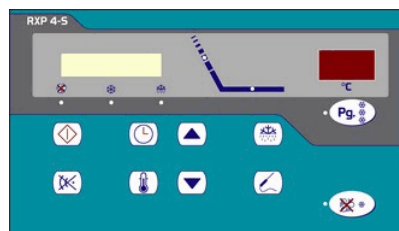

DESCRIPTION

- Isothermal panels made of polyurethan foam, 90 mm thick, density 35 kgm³, high insulation coefficient Lambda = 0,022
- Outside is pre-enameled
- Interior and front are made of STAINLESS STEEL
- Door hinges on right hand side for the 2 right doors and hinges on the left hand side for the other doors
- Stainless steel slipper-guides: pitch 63 mm (adjustable every 20mm) in preserver, pitch 84mm in deep freezer
- Machine on screw-jacks 150mm high.
- Régulation : Electronic control board RXP4S
- Machine can be dismantled
- Remote compressor

OPTIONS

- Extension module of 2 doors in positive cold
- Outside made of stainless steel
- Temperature pin probe
- 48 trays 400x600 and 6 basquets 400x600

Width	Depth	Height	Opened door depth	Door passage	Net Weight	Electrical Supply	Absorbed power	Absorbed current
1904 mm	1215 mm	2255 mm	1965 mm	600 mm	399 kg	400V TRI 50Hz	4.3 KW	6.2 A
			Cold power -30/+32°C		Defrosting power	Cooling fluid	Cooling fluid load	
			4 CV	3146 W	2050 W	R404A	3 kg	

Indicated height of the machine is determined for remote compressors

- provide +100mm for gas solenoid valves, tubes and cables
- provide +500mm in case of compressors located on the roof